


EYE TO EYE TURNBUCKLES - GALVANISED

- FORMERLY U.S. FEDERAL SPECIFICATION

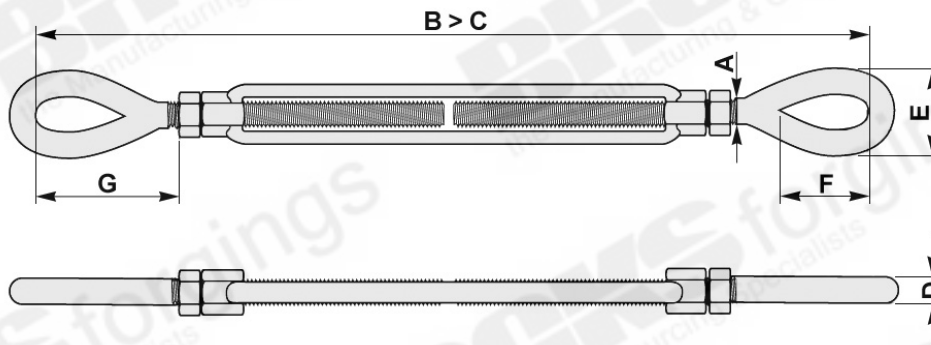

Thread Size A	Take Up	B	C	D	E	F	G	SWL	Weight Each
	inches								
3/8	6	302	454	9	13	28	65	0.54	0.32
1/2	6	338	490	12	18	36	80	1.00	0.66
1/2	9	414	642	12	18	36	80	1.00	0.76
1/2	12	490	795	12	18	36	80	1.00	0.91
5/8	6	394	546	14	21	43	98	1.59	1.07
5/8	9	470	698	14	21	43	98	1.59	1.31
5/8	12	546	851	14	21	43	98	1.59	1.71
5/8	18	701	1150	14	21	43	98	1.59	1.86
3/4	6	432	584	17	25	53	113	2.36	1.65
3/4	9	508	736	17	25	53	113	2.36	1.95
3/4	12	584	883	17	25	53	113	2.36	2.30
3/4	18	737	1194	17	25	53	113	2.36	2.85
7/8	12	625	854	20	31	59	118	3.27	3.33
7/8	18	778	1121	20	31	59	118	3.27	4.24
1	6	524	676	22	36	74	155	4.54	3.87
1	12	676	981	22	36	74	155	4.54	5.09
1	18	829	1286	22	36	74	155	4.54	6.00
1	24	980	1592	22	36	74	155	4.54	7.52
1. 1/4	12	760	1055	29	45	88	197	6.90	8.12
1. 1/4	18	912	1370	29	45	88	197	6.90	10.40
1. 1/4	24	1064	1665	29	45	88	197	6.90	12.10
1. 1/2	12	823	1129	32	54	105	215	9.71	12.70
1. 1/2	18	975	1434	32	54	105	215	9.71	15.10
1. 1/2	24	1128	1738	32	54	105	215	9.71	17.10
1. 3/4	18	1060	1533	38	60	119	254	12.70	23.10
1. 3/4	24	1213	1838	38	69	119	254	12.70	26.30
2	24	1315	2011	45	69	146	308	16.78	40.70
2. 1/2	24	1486	2098	51	79	165	344	27.22	64.00
2. 3/4	24	1562	2171	57	83	178	381	34.02	88.00