



ISO 9001




Approved



Approved

HOOK TO HOOK TURNBUCKLES - GALVANISED

- FORMERLY U.S. FEDERAL SPECIFICATION

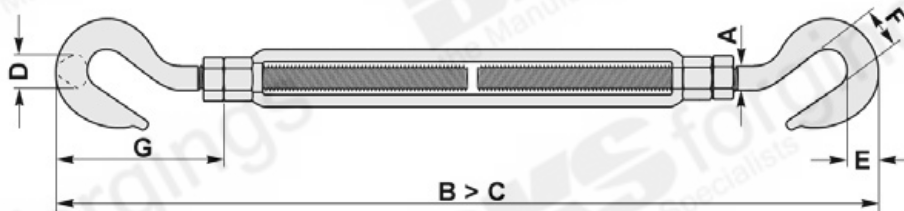

Thread Size A	Take Up	B min	C max	D mm	E mm	F mm	G mm	SWL Tonnes	Weight Each kgs
	inches								
3/8	6	302	416	10	15	14	58	0.45	0.32
1/2	6	338	452	13	19	17	72	0.68	0.66
1/2	9	414	585	13	19	17	72	0.68	0.76
1/2	12	490	719	13	19	17	72	0.68	0.91
5/8	6	394	508	16	23	22	90	1.02	1.07
5/8	9	470	641	16	23	22	90	1.02	1.31
5/8	12	546	775	16	23	22	90	1.02	1.71
5/8	18	701	1150	16	23	22	90	1.02	1.86
3/4	6	432	546	20	27	25	98	1.36	1.65
3/4	9	508	679	20	27	25	98	1.36	1.95
3/4	12	584	813	20	27	25	98	1.36	2.30
3/4	18	737	1080	20	27	25	98	1.36	2.85
7/8	12	625	854	23	30	29	126	1.81	3.33
7/8	18	778	1121	23	30	29	126	1.81	4.24
1	6	524	638	23	35	32	144	2.27	3.87
1	12	676	905	25	35	32	144	2.27	5.09
1	18	829	1172	25	35	32	144	2.27	6.00
1	24	980	1437	25	35	32	144	2.27	7.52
1. 1/4	12	760	989	28	37	39	175	3.51	8.12
1. 1/4	18	912	1255	28	37	39	175	3.51	10.40
1. 1/4	24	1064	1521	28	37	39	175	3.51	12.10
1. 1/2	12	823	1052	33	44	47	212	3.4	12.70
1. 1/2	18	975	1318	33	44	47	212	3.4	15.10
1. 1/2	24	1128	1585	33	44	47	212	3.4	17.10