



ISO 9001



Approved




national highway sector schemes

Approved

## JAW TO JAW TURNBUCKLES - GALVANISED

- FORMERLY U.S. FEDERAL SPECIFICATION

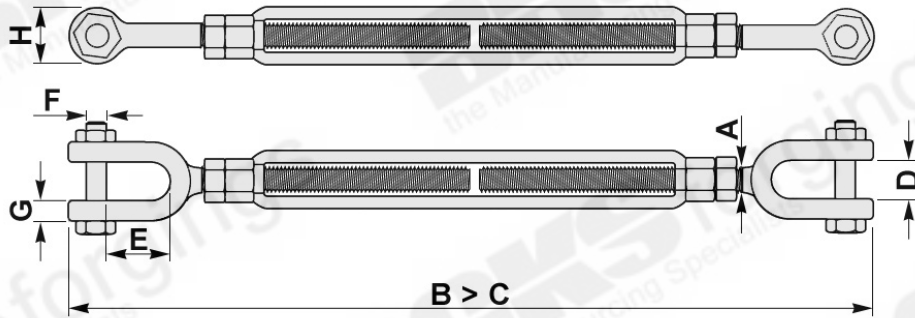

Thread Size <b>A</b>	Take Up	<b>B</b> min	<b>C</b> max	<b>D</b> mm	<b>E</b> mm	<b>F</b> mm	<b>G</b> mm	<b>H</b> mm	<b>SWL</b> Tonnes	<b>Weight Each</b> kgs
	inches									
3/8	6	302	454	13	22	8	8	21	0.54	0.37
1/2	6	338	490	16	26	9.5	10	25	1.00	0.73
1/2	9	414	642	16	26	9.5	10	25	1.00	0.79
1/2	12	490	795	16	26	9.5	10	25	1.00	0.96
5/8	6	394	546	18	33	13	13	33	1.59	1.37
5/8	9	470	698	18	33	13	13	33	1.59	1.31
5/8	12	546	851	18	33	13	13	33	1.59	1.53
5/8	18	701	1150	18	33	13	13	33	1.59	1.86
3/4	6	432	584	23	38	15.5	16	41	2.36	1.86
3/4	9	508	736	23	38	15.5	16	41	2.36	2.31
3/4	12	584	883	23	38	15.5	16	41	2.36	2.56
3/4	18	737	1194	23	38	15.5	16	41	2.36	3.11
7/8	12	625	854	27	44	19	18	48	3.27	3.71
7/8	18	778	1121	27	44	19	18	48	3.27	4.14
1	6	524	676	30	52	22	20	54	4.54	4.29
1	12	676	981	30	52	22	20	54	4.54	5.07
1	18	829	1286	30	52	22	20	54	4.54	6.62
1	24	980	1592	30	52	22	20	54	4.54	7.85
1. 1/4	12	760	1055	44	73	29	25	67	6.90	9.48
1. 1/4	18	912	1370	44	73	29	25	67	6.90	11.60
1. 1/4	24	1064	1665	44	73	29	25	67	6.90	13.00
1. 1/2	12	823	1129	52	70	35	27	80	9.71	13.60
1. 1/2	18	975	1434	52	70	35	27	80	9.71	14.30
1. 1/2	24	1128	1738	52	70	35	27	80	9.71	18.40
1. 3/4	18	1060	1533	59	85	41	33	90	12.70	25.00
1. 3/4	24	1213	1838	59	85	41	33	90	12.70	28.70
2	24	1315	2011	64	93	51	39	108	16.78	45.40
2. 1/2	24	1486	2098	75	114	57	38	143	27.22	73.00
2. 3/4	24	1562	2171	89	110	70	42	156	34.02	98.00